



Single and Dual Output 6W DC-DC Converters



Features	Benefits
• 60601-1 approval	• Easier system approval
• I/O isolation 5kVAC, 2MOPP	• Patient protection at 250VAC rms working voltage
• 0.25 μ A low leakage	• Wide range of medical applications
• 4:1 Wide input range	• Less parts to inventory

Specification																	
Model	PXC-M06 (W)																
Rated input voltage range	24V nominal: 9-36VDC, 48V nominal: 18-75VDC																
Input surge voltage (max 3 seconds)	24V Nom : 50VDC 48V Nom: 100VDC																
Switching frequency	250kHz																
Maximum input current (no load)	See Table																
Fusing	No internal fuse																
Max output power (W)	6																
Voltage accuracy	Single/Dual \pm 1%																
Voltage adjustment (Note 1)	Single output 3.3V, 5V & 12V: \pm 10%, 15V & 24V: -10%/+20% Dual output \pm 5V, \pm 12V & \pm 15V: \pm 10%																
Line regulation (LL to HL at full load)	Single output \pm 0.2%, Dual output \pm 0.5%																
Ripple and noise (Note 7)	Measured with a 20MHz bandwidth - see table																
Start up time (Nominal Vin and constant resistive load)	Power on: 30ms, Remote ON/OFF: 30ms																
Start up voltage	24Vin(nom) 9V, 48V(nom) 18V																
Shutdown voltage	24Vin(nom) 8V, 48V(nom) 16V																
Remote on/off (option) (Note 1 & Note 6)	DC ON: OPEN or 0 to 1.2VDC DC OFF: 2.2 to 12VDC																
Efficiency	See Table																
Over current protection, factory set	Hiccup, 150% of rated full load																
Short circuit protection (Note 2)	Continuous, auto recovery																
Overvoltage protection	<table border="0"> <tr> <td>3.3V output</td> <td>3.7 to 5V</td> </tr> <tr> <td>5V output</td> <td>5.6 to 7.0V</td> </tr> <tr> <td>12V output</td> <td>13.5 to 16V</td> </tr> <tr> <td>15V output</td> <td>18.3 to 22.0V</td> </tr> <tr> <td>24V output</td> <td>29.1 to 34.5V</td> </tr> <tr> <td>5V/5V output</td> <td>5.6 to 7.0V</td> </tr> <tr> <td>12V/12V output</td> <td>13.5 to 18.2V</td> </tr> <tr> <td>15V/15V output</td> <td>17.0 to 22.0V</td> </tr> </table>	3.3V output	3.7 to 5V	5V output	5.6 to 7.0V	12V output	13.5 to 16V	15V output	18.3 to 22.0V	24V output	29.1 to 34.5V	5V/5V output	5.6 to 7.0V	12V/12V output	13.5 to 18.2V	15V/15V output	17.0 to 22.0V
3.3V output	3.7 to 5V																
5V output	5.6 to 7.0V																
12V output	13.5 to 16V																
15V output	18.3 to 22.0V																
24V output	29.1 to 34.5V																
5V/5V output	5.6 to 7.0V																
12V/12V output	13.5 to 18.2V																
15V/15V output	17.0 to 22.0V																
Operating temperature	-40°C ~ +88°C (without derating), +88°C ~ +105°C (with derating - see curve)																
Storage temperature	-55°C ~ +125°C																
Thermal shock	MIL-STD-810F																
Relative humidity (non condensing)	5% to 95% RH																
Transient response (25% step load change)	250 μ S																
Isolation voltage (1 minute) (Note8)	5kVAC																
Isolation capacitance (max)	17pF																
MTBF MIL-HDBK-217F (Note 3)	644,400 hrs																
Vibration	MIL-STD-810F																
Conducted and radiated emissions (Note 4)	EN55011, EN55022, Class A and FCC part 18																
Immunity (Note 5)	EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6: Perf. Criteria A																
Safety	IEC60601-1, ANSI/AAMI ES60601-1, EN60601-1, CE Mark																
Size (H x W x D)	10.2 x 20.3 x 31.8 mm																
Weight	14g																
Connector	PCB mount																
Cooling	Convection																
Warranty yrs	5																


Notes: See page 2

Model Selector

Model	Input Voltage (VDC)	Output Voltage (VDC)	Output Current Full Load (mA)	Output ⁽⁷⁾ Ripple & Noise (mV)	Input Current No Load mA	Efficiency % ⁽²⁾	Maximum Capacitive Load ⁽²⁾
PXC-M06-24WS3P3	9 ~ 36	3.3	1800	30	6	83	2100
PXC-M06-24WS05	9 ~ 36	5	1200	30	6	86	1500
PXC-M06-24WS12	9 ~ 36	12	500	40	6	89	260
PXC-M06-24WS15	9 ~ 36	15	400	40	6	89	210
PXC-M06-24WS24	9 ~ 36	24	250	50	6	88.5	75
PXC-M06-24WD05	9 ~ 36	±5	±600	30	6	85	± 860
PXC-M06-24WD12	9 ~ 36	±12	±250	40	6	88.5	± 150
PXC-M06-24WD15	9 ~ 36	±15	±200	40	6	88.5	± 110
PXC-M06-48WS3P3	18 ~ 75	3.3	1800	30	4	82.5	2100
PXC-M06-48WS05	18 ~ 75	5	1200	30	4	86.5	1500
PXC-M06-48WS12	18 ~ 75	12	500	40	4	88	260
PXC-M06-48WS15	18 ~ 75	15	400	40	4	88.5	210
PXC-M06-48WS24	18 ~ 75	24	250	50	4	88	75
PXC-M06-48WD05	18 ~ 75	±5	±600	30	4	85	± 860
PXC-M06-48WD12	18 ~ 75	±12	±250	40	4	88	± 150
PXC-M06-48WD15	18 ~ 75	±15	±200	40	4	87	± 110

- Notes**
- Not available for A type pin configuration
 - Typical value at nominal input voltage and full load.
 - ML-HDBK-217F Notice2 @Ta=25°C, Full load (Ground Benign, controlled environment).
 - Built in Class A filter. Class B can be achieved with the addition of external components for further information contact your local TDK-Lambda sales office
 - Meeting EN61000-4-4 and 61000-4-5 requires and additional input electrolytic capacitor: 5V input -1000µF/25V, 12V & 24V input - 470µF/50V and 48V input - 330µF/100V
 - The ON/OFF control pin voltage is referenced to -Vin.The ctrl pin input current is <1mA.Remote off input current is typically 2.5mA
 - For R & N, measure the 24V output with a 4.7µF/50V X7R MLCC. All other outputs use a 10µF25V X7R MLCC. Nominal input, full load at +25°C
 - Reinforced insulation 8mm at 250VAC

Outline Drawing PXC-M06 (W)

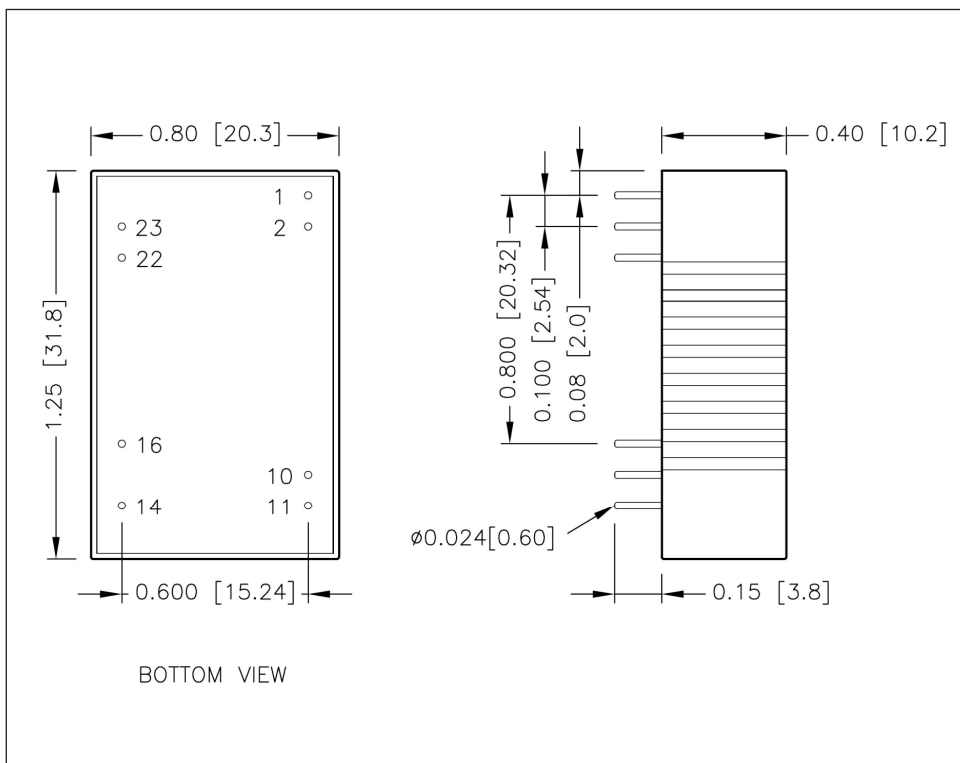

Pin Assignment PXC-M06 (W)

PIN	Single	Dual
1	CtrlL (Option) / No pin*	CtrlL (Option) / No pin*
2	-Vin	-Vin
10	Trim (option) / No Pin*	Trim (option) / No Pin*
11	No Pin / NC **	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

NOTES:

* If the Ctrl or Trim option is not selected there will be no pin fitted in the corresponding pin number position.

** Pin 11 is "No pin" for PXC-M06-xxWSxxx-T, PXC-M06-xxWSxxx-PT

Pin 11 is "NC" for: PXC-M06-xxWSxxx, PXC-M06-xxWSxxx-P

Options


Suffix	Description
P	Positive Logic
T	Trim
PT	Positive Logic & Trim

Standard part is no suffix. Add P, T, or PT as required

External Output Trimming

The output of the PXC-M06 (W) can be adjusted by connecting an external resistor. **See application note on the website.**


Outline Drawing PXC-M06 (W) A-type

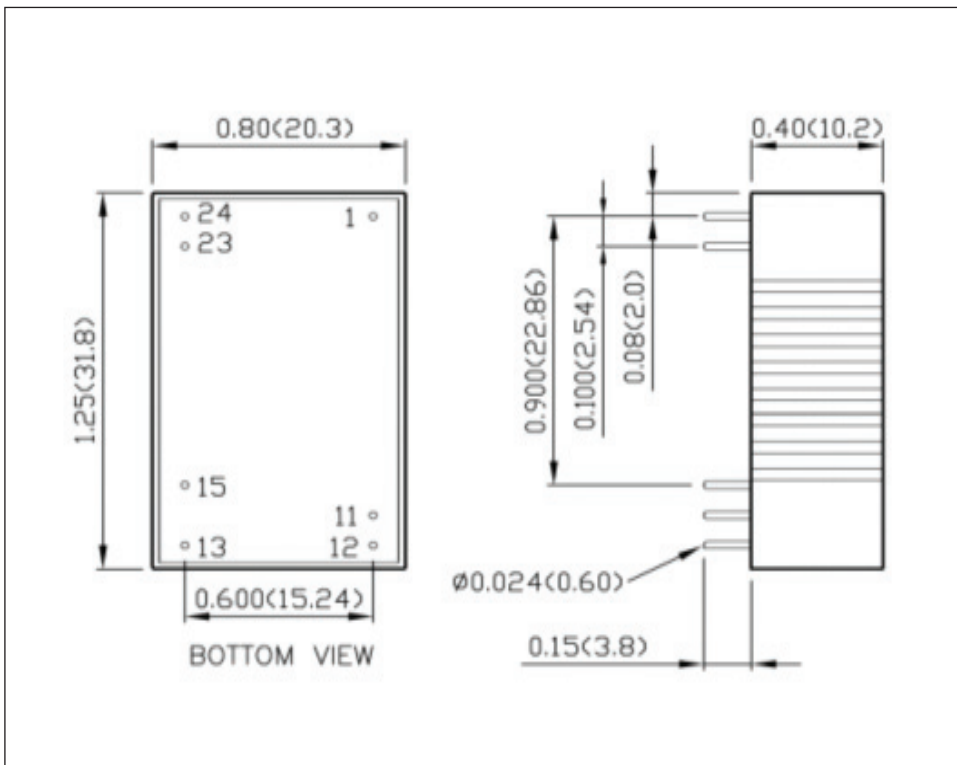


Pin Assignment PXC-M06 (W) A-type

PIN	Single	Dual
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin


PXC-M06-48WS05A Derating curve

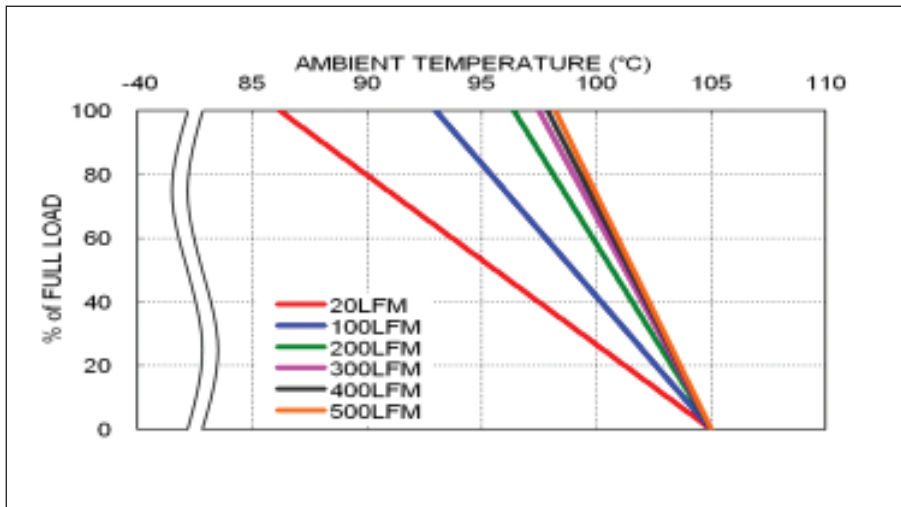

PXC-M06-48WS05A Efficiency Vs Input Voltage

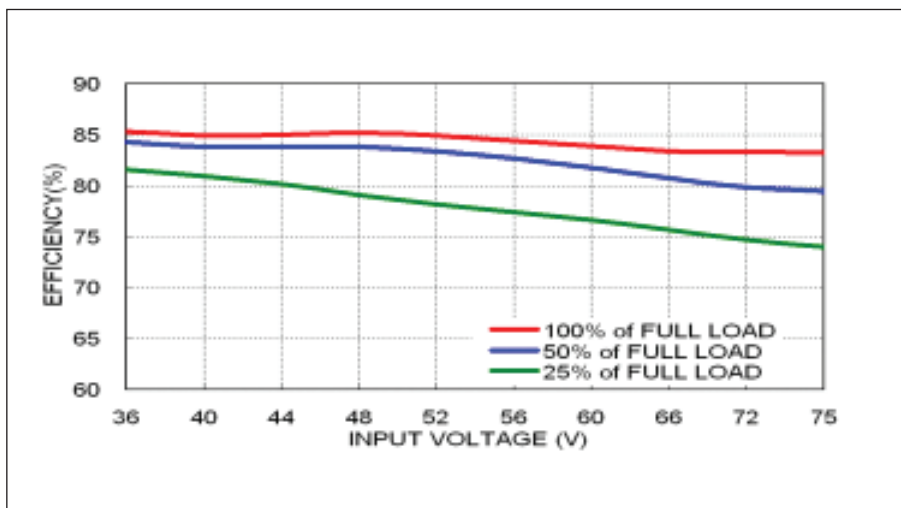

PXC-M06-48WS05A Efficiency Vs Output Voltage

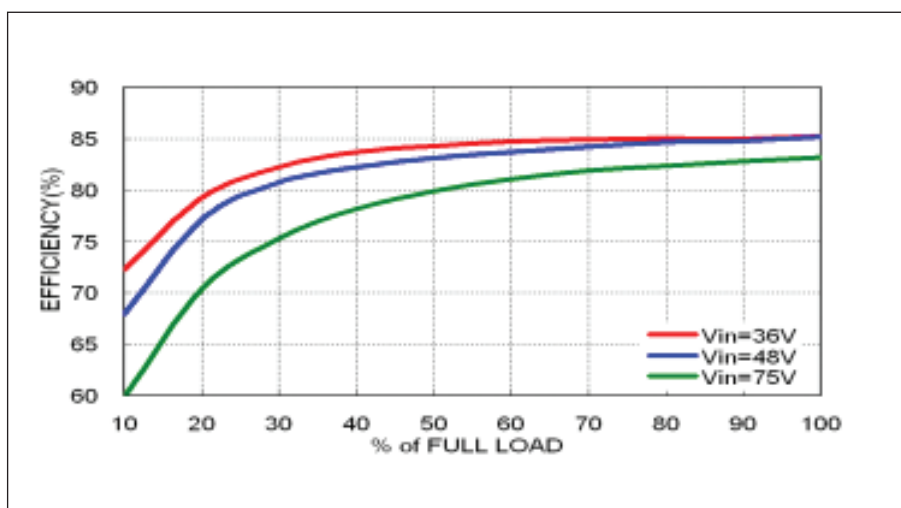



TDK-Lambda France SAS

3 Avenue du Canada
 Parc Technopolis
 Bâtiment Sigma
 91940 les Ulis
 France
 Tel: +33 1 60 12 71 65
 Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via Giacomo Matteotti 62
 20092 Cinisello Balsamo (MI)
 Italy
 Tel: +39 02 61 29 38 63
 Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
 77855 Achern
 Germany
 Tel: +49 7841 666 0
 Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
 2544 Leobersdorf
 Austria
 Tel: +43 2256 655 84
 Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com



Switzerland Sales Office

Eichtalstrasse 55
 8634 Hombrechtikon
 Switzerland
 Tel: +41 44 850 53 53
 Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
 DK-6000 Kolding
 Denmark
 Tel: +45 8853 8086
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
 Ilfracombe
 Devon EX34 8ES
 United Kingdom
 Tel: +44 (0) 12 71 85 66 66
 Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

1 Alexander Yanai
 Segula
 Petah-Tikva
 Israel
 Tel: +9 723 902 4333
 Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:
 Tel: +7 (495) 665 2627
Technical Support:
 Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.tdk-lambda.ru

Local Distribution

