

CB
scheme

CE

RoHS
2011/65/EU

■ Main Features

- High efficiency and compact size
- Active PFC
- Wide input voltage range 170...550Vac
- Wide output voltage range 36...205Vdc, user settable
- 2 user programmable voltage steps with settable duration
- Digital Power regulation
- Remote ON/OFF or other remote control functions possible through ENABLE input
- Multiple protections
- Ideal for elevator application
- Excellent versatility, allowing parts stock savings
- Up to 50°C operating temperature with no derating

TECHNICAL DATA

Model type	SBP200
OUTPUT DATA	
Rated voltage	36...205Vdc
Adj. output voltage range	36...205Vdc (1V resolution programmable)
Continuous current	2.3A Max. or $V_{out} \times I_{out} = 187W$ Max. for $V_{out} > 80Vdc$
Overload limit	2.4A
Short circuit peak current	2.5A
Load regulation	$\leq 1\%$
Ripple & Noise ¹	$\leq 600mVpp$
Hold up time	$\geq 30ms$
Protections	<ul style="list-style-type: none"> ▪ Overload and short circuit with constant current (3s) and one shot (no auto recovery) ▪ Thermal protection ▪ Input undervoltage lockout (UVLO) ▪ Input overvoltage protection (VDR)
Status Signals	<ul style="list-style-type: none"> ▪ 7 segment, 3 digits display ▪ 3 programming keys ▪ ENABLE - Insulated remote ON/OFF input, active for 12...230Vac/dc
Parallel connection	Possible with external ORing module
INPUT DATA	
Input AC rated voltage ²	Nominal: 1/2 phases 200...500Vac Range: 170...550Vac 47...63Hz
Input DC rated voltage	250...725Vdc
Input AC rated current $V_{in} = 200Vac$	1.4A
$V_{in} = 500Vac$	0.5A
Input DC rated current $V_{in} = 250Vdc$	1.4A
$V_{in} = 725Vdc$	0.7A
Standby power	< 6W
Power Factor Correction	Active > 0.9
Inrush peak current ³ / I^2t	$\leq 40A / 0.69A^2s$
Touch (leakage) current	$\leq 0.3mA$
Internal Protection fuse	None, external fuse must be provided
Recommended external protection	MCB 6A C or 4A D curve It is strongly recommended to provide external surge arresters (SPD) according to local regulations.
GENERAL DATA	
Efficiency	> 87%
Dissipated power	< 28W
Operating temperature ⁴	- 40°C...+ 70°C
Derating	- 4.2W/°C over 50°C (do not exceed $V_{out} \times I_{out} = 100W$ Max. at 70°C)
Storage temperature	- 40°C...+ 80°C
Humidity	5...95% r.H. non condensing
Life time expectation	71'686h (8.1 years) at 25°C ambient full load
MTBF	<ul style="list-style-type: none"> ▪ MIL-HDBK-217F > 500'000h at 25°C ambient full load
Overvoltage category	<ul style="list-style-type: none"> ▪ EN50178 III
Pollution degree	<ul style="list-style-type: none"> ▪ IEC60664-1 2
Input / output isolation	4.2kVdc
Input / ground isolation	3.4kVdc
Input / ENABLE isolation	4.2kVdc
Output / ground isolation	1.65kVdc
Output / ENABLE isolation	4.2kVdc
ENABLE / ground isolation	4.2kVdc
Safety Standards	<ul style="list-style-type: none"> ▪ UL508 (reference) ▪ IEC/EN61010-1 (reference) ▪ IEC/EN61010-2-201 (reference) ▪ IEC60950 (reference)
EMC Emission	<ul style="list-style-type: none"> ▪ EN55011 (CISPR11) Class A ▪ EN55022 (CISPR22) Class A ▪ EN12015 Class A ▪ EN61000-3-2 Class A
EMC Immunity	<ul style="list-style-type: none"> ▪ EN61000-4-2 Level 3 ▪ EN61000-4-3 Level 3 ▪ EN61000-4-4 Level 3 ▪ EN61000-4-5 Level 4 ▪ EN61000-4-11 Level 2 ▪ EN12016
Protection degree	IP20
Vibration sinusoidal	<ul style="list-style-type: none"> ▪ IEC60068-2-6 (5-17.8Hz: $\pm 1.6mm$; 17.8-500Hz: 2g 2hours / axis X,Y,Z)
Shock	<ul style="list-style-type: none"> ▪ IEC60068-2-27 (30g 6ms, 20g 11ms; 3 bumps / direction, 18 bumps total)
Connection terminals	2.5mm ² , screw type pluggable (24...12AWG)

Case material	Aluminum
Weight	0.75kg
Size (W x H x D)	80.0 x 120.0 x 100.0mm

1) Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

2) CB Scheme certified up to 528Vac.


3) Peak current measured after 0.2ms from main connection; 400Vac/50Hz; Ambient temperature at 25°C; Cold Start.

4) Start-up type tested: -40°C, possible at nominal voltage with load deration.

Notes:

- For more details, performance and descriptions regarding all parameters not indicated in the above table, please refer to the instruction manual downloadable from www.nextys.com
- Technical parameters are typical, measured in laboratory environment at 25°C and 400Vac / 50Hz, at nominal values, after minimum 5 minutes of operation.
- Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.
- Data may change without prior notice in order to improve the product.

DIMENSIONS

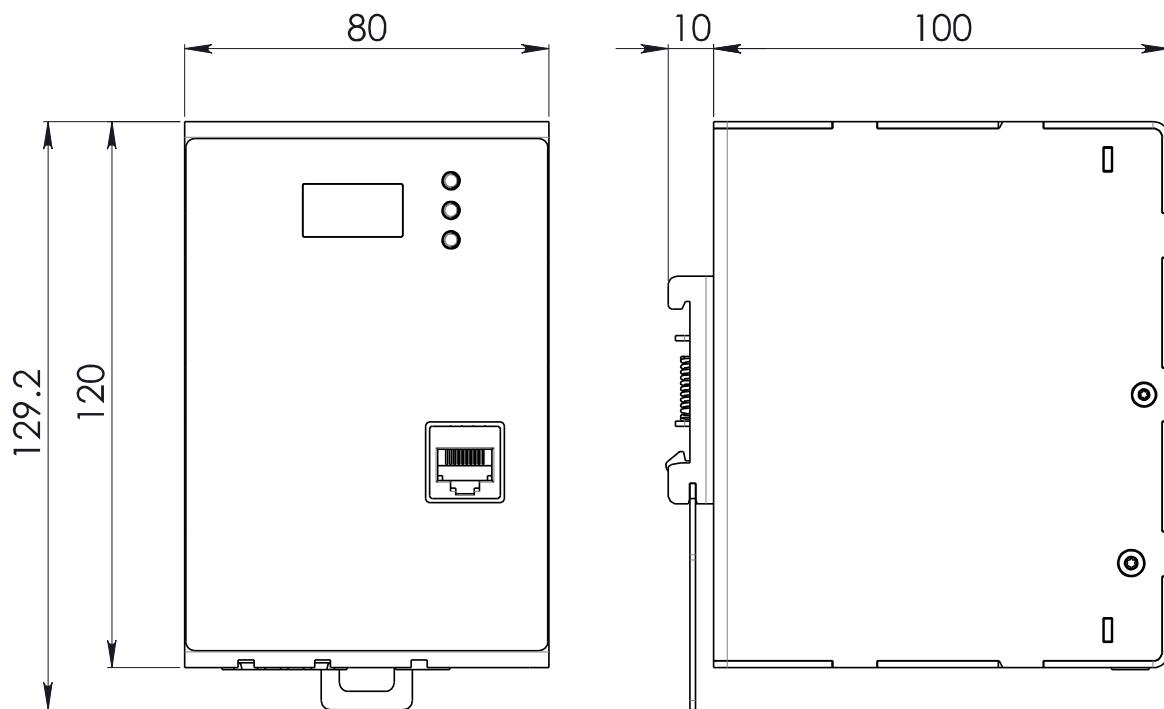

CONNECTION



Input Connection:

Single phase:

- L1 = Line
- N = Neutral
- \ominus = Earth ground

2 phases:

- L1 = Phase 1
- L2 = Phase 2
- \ominus = Earth ground

DC:

- L1 = + Positive DC
- L2 = - Negative DC
- \ominus = Earth ground

ENABLE: (12...230Vac/dc)

- E+ = Positive DC
- E- = Negative DC

Output Connection:

- + = Positive DC
- - = Negative DC