











■ Main Features

- "All-in-one" economic solution for general purpose
- J Input: 120...240Vac
- J Output: 12 or 24Vdc model dependent
- J To be used with lead acid and lithium batteries (compatible with lead acid batteries)
- J Instantaneous LOAD switch BACKUP mode

NCU120 Series - Rev.V14 Page 1/3

NCU120 Series



TECHNICAL DATA

Model type	NCU120-12		NCU120-24
OUTPUT DATA			
Rated voltage	12Vdc		24Vdc
Adj. output voltage range	12.515.5Vd		2328Vdc
	(to be set at 14Vdc for correct battery charging)		(to be set at 27Vdc for correct battery charging)
Continuous current	7.0A		5.0A
Overload limit	11.5A		6.5A
Short circuit peak current	> 20A for 40ms		> 16A for 80ms
Load regulation	≤1% <100mVnn		
Ripple & Noise ¹	≤ 100mVpp		
Hold up time	. 40		. 40
Vin = 120Vac Vin = 240Vac	≥ 10ms		≥ 10ms ≥ 55ms
VIII = Z4UVaC	≥ 80ms		2 551115
Protections	 Overload/short circuit: Hiccup mode Thermal protection Output overvoltage 		
Output overvoltage protection (active)	≥ 18Vdc		≥ 33Vdc
() () () () () () () () () ()	 Against short-circuit with resettable fuse (9A) 		
Battery protections	Against reverse polarity connection Against deep discharge		
Deep discharge cut-off voltage	10.5Vdc ± 0.5V		20.5Vdc ± 0.5V
Status Signals	 LOAD ON PSU - green LED LOAD ON BATTERY - red LED Dry contact (SPDT, 24Vdc / 1A) 		
Parallel connection	Not recommended		
BATTERY INFO			
Rated voltage	1214.4Vdd		2428.8Vdc
	1214.4VU0		
Charging current		0.8A	max.
INPUT DATA			
Input AC rated voltage	Nominal: 120240Vac		
Frequency	Range: 100264Vac		
	4763Hz		
Input DC rated voltage	110345Vdc		
Input AC rated current			
Vin = 120Vac	2.0A		
Vin = 240Vac	1.1A		
Input DC rated current			
Vin = 110Vdc	1.4A		
Vin = 345Vdc	0.5A		
Inrush peak current ² / I ² t	≤ 24A / 0.50A²s		
Touch (leakage) current	≤ 0.6mA		
Internal protection fuse	Fuse 3.15AT (not user replaceable)		
	, , , ,		
Recommended external protection ³	Fuse 4AT or MCB 4A C curve / Cartridge fuse Class CC 4AT 250Vac It is strongly recommended to provide external surge arresters (SPD) according to local regulations.		
GENERAL DATA	it is strongly recommended to provide external surge arresters (SPD) according to local regulations.		
Efficiency	> 83.5%		> 86%
Dissipated power	< 21W		< 20W
·	12211	- 40°C	
Operating temperature ⁴		UL certified	
Derating	- 0.75W/°C over		- 1.2W/°C over 50°C
Storage temperature	0.75W/ COVE		· · · · · · · · · · · · · · · · · · ·
	- 40°C+ 80°C		
Humidity	595% r.H. non condensing		
Life time expectation	167'953h (19.1 years) at 25°C ambient full load		
MTBF	■ MIL-HDBK-217F	> 600'000h at 25'	'C ambient full load
Overvoltage category	■ EN50178 II	I	
Pollution degree	■ IEC60664-1 2		
Protection Class	Class		
Input / output isolation		4.2k	Vdc
Input / ground isolation	2.2kVdc		
Output / ground isolation	2.2kVdc 0.75kVdc		
Satpat / Broaria isolation	• III.508 (r		
Safety Standards	-	certified E356563) reference)	
Salety Standards	•	reference)	
		lass A	
EMC Emission		lass A	
		evel 3 evel 2	
EMC Immunity			
Z		evel 3	
		evel 2	
Protection degree		220	
			17: 2a 2hours / 2vis (V V 7)
Vibration sinuosoidal	■ IEC 60068-2-6 (5-17.8Hz: ±1.6mm; 17.8-500Hz: 2g 2hours / axis (X,Y,Z)		
Shock	■ IEC 60068-2-27 (30g 6ms, 20g 11ms; 3 bumps / direction, 18 bumps total)		
Connection terminals		2.5mm², screw type pl	uggable (2412AWG)

NCU120 Series – Rev.V14 Page 2/3




Case material	Aluminum	
Weight	0.50kg	
Size (W x H x D)	54.0 x 115.0 x 110.0mm	

- 1) Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1uF MKP parallel capacitor.
- 2) Peak current measured after 0.2ms from main connection; 240Vac/50Hz; Ambient temperature at 25°C; Cold Start.
- 3) In order to be UL compliant use Listed Cartridge nonrenewable (JDD2) fuse Class CC 4AT 250Vac. 4) Start-up type tested: 40°C, possible at nominal voltage with load deration.

- Technical parameters are typical, measured in laboratory environment at 25°C and 240Vac / 50Hz, at nominal values, after minimum 5 minutes of operation.
- Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.
- Data may change without prior notice in order to improve the product.

DIMENSIONS

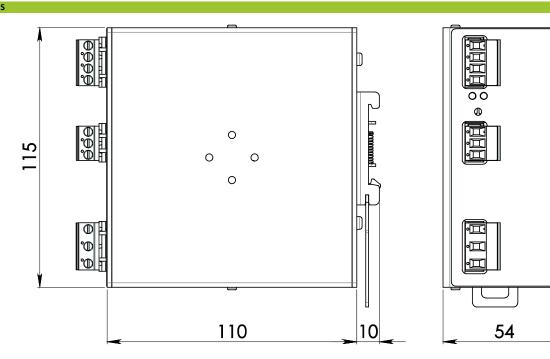

CONNECTION





Input Connection:

Single phase:

- L = Line
- N = Neutral
- I = Earth ground

- L = + Positive DC
- N = Negative DC
- I = Earth ground

Output Connection:

- LOAD + = Positive DC
- LOAD = Negative DC
- BATT + = Positive DC Battery
- BATT = Negative DC Battery

Signalling:

SPDT dry contact

- NO
- NC
- COM

NCU120 Series - Rev.V14 Page 3/3